


Power Genius XL



Power Cable




Ethernet Cable



CD


Verify contents of the box

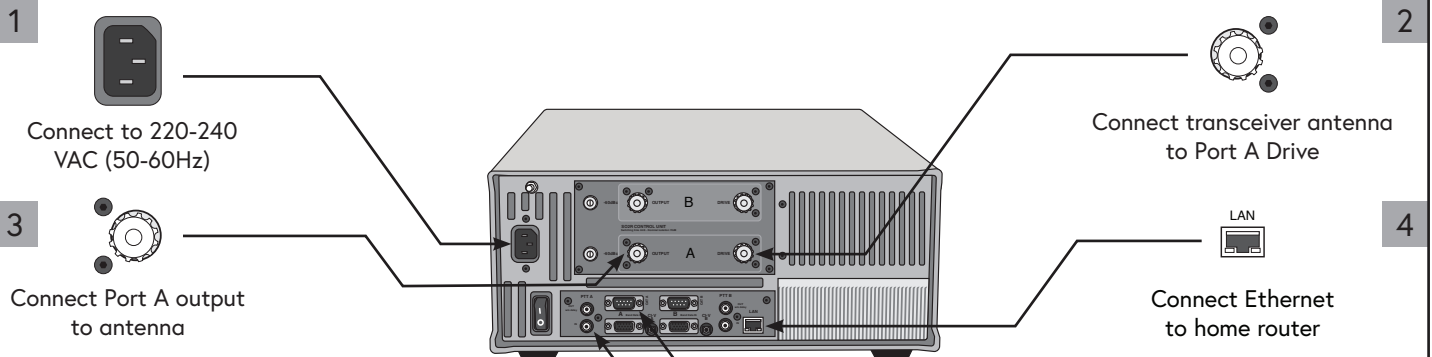


For connecting to non FlexRadio transceivers




Make connections

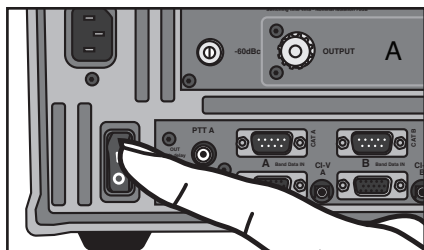

Turn on Amplifier

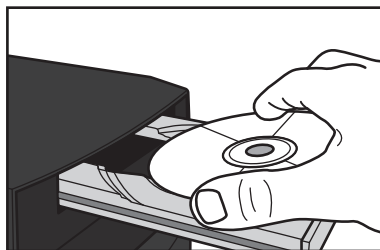

Install Power Genius
Software from CD

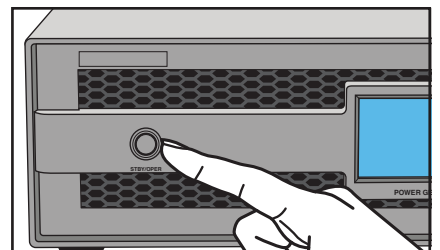

Press STBY/OPR

For connecting to FlexRadio transceivers

Power Genius XL Configuration

Network CAT / CI-V FlexRadio Other

Port A Configuration

Serial no.: XXXX-XXXX-XXXX-XXXX

TX Antenna: ANT1 PTT source: LAN

Port B Configuration

Serial no.: XXXX-XXXX-XXXX-XXXX

TX Antenna: ANT2 PTT source: LAN

FlexRadio Save Cancel

Select radio then Save

For connecting to non-FlexRadio transceivers

Power Genius XL Configuration

Network CAT / CI-V FlexRadio Other

Radio 1

Radio type: Kenwood

Baud rate: 4800 8N1

Radio 2

Radio type: Kenwood

Baud rate: 4800 8N1

FlexRadio Save Cancel

Select radio type then Save

Configure

For Maestro users

< Exit

Maestro

Radio

Function F1-F6

Network

Audio

Transmit

Phone/CW

XVTR

Profiles

Memory

GPS

General

Tune Power: 10

Hardware ALC: Disabled

Show TX in Waterfall: Disabled

Max Power: 100

Timings (in ms)

ACC TX: 0

Enabled

TX Delay: 20

RCA TX1: 0

Enabled

Time Out (min): 0

TX Inhibit: Disabled

Interlocks - TX REQ

Accessory: Disabled


TX EQ: Enabled

Hz: 63 125 250 500 1k 2k 4k 8k

Set transceiver TX Delay to 20ms

For SmartSDR users

Startup Radio Transmit CW Phone Receive



FLEX-6300

Timings (in ms)

ACC TX: 0

Enabled

TX Delay: 20

RCA TX1: 0

Enabled

Timeout(min): 0

TX Inhibit: Disabled

Interlocks - TX REQ

Accessory: Active Low

Tune Power: 100

Hardware ALC: Disabled

Show TX in Waterfall: Disabled

Set transceiver TX Delay to 20ms

Configure Transmit Delay

For any additional information on safety and operation please refer to the User Manual on the included CD
For technical support go to helpdesk.flexradio.com

Safety Information

- WARNING HIGH VOLTAGE ! Do not touch antenna, antenna cable or antenna plugs and sockets during transmission. This may result in an electrical shock or burn of your skin by high-frequency.
- WARNING ! The plug of the 230V power cord represents the designated separation device of the amplifier from the mains according to standard. The socket must be placed near the amplifier and easily accessible. The power cord must be able to be easily disconnected from mains.
- CAUTION ! Make sure that no objects may penetrate into device or will touch connectors on rear panel of the power amplifier. This could cause electrical shock and severe injury.
- PROTECT the amplifier from precipitation like rain or any liquid.
Do not operate the power amplifier in excessively dusty or very humid environment.
- PROTECT the amplifier from operation by any unauthorized person notably children.
- AVOID placing and using the power amplifier in areas with temperatures below -15°C or above +50°C.
If the environment temperature drops so low that the dew point is undercut, avoid operating before the devices are dried completely.
- AVOID placing the power amplifier against a wall. This may inhibit proper air circulation and could cause overheat.
Do not cover any air inlets and outlets at front, bottom and rear panel of the device.
- Always handle the unit with care – consider the weight of 37.4 lbs (17Kg).
- Please make sure proper air circulation. Do not cover any air inlets and outlets at front, top and rear panel of the device.
- Choose the place of installation so that all connectors of the unit are reachable at any time, this is especially true for the supply cable connector.
- Select a power outlet that is capable to handle the power requirements. Connect your unit to a proper ground system. In addition, observe the relevant technical electrical regulations and the local regulations of the power supplier. A good grounding system not only prevents electrical shock but also helps to ensure trouble free operation and will diminish television and broadcast interference (TVI/BCI).
- No other physical modification of this unit is allowed. Any other use or modification (including software changes that affect operational characteristics) will void the manufacturer's warranty.
- Please study the complete Quick Start Guide and Owner's Manual. These documents provide important information regarding the safe operation of this unit. If you have any questions, please contact the manufacturer or local distributor for further information.
- This unit must only be opened and/or serviced by a qualified technician. Opening the unit may void the manufacturer's warranty.
- If this unit is intended for use in commercial applications, special safety regulations and cautions may apply to prevent accidents.
- If any defect, abnormal result, or other observations occur that are not covered by this Quick Start Guide; immediately cease operation and contact the manufacturer or local distributor for operation advice or repair of the unit.
- This unit contains small parts that could be a choking hazard to children. Do not leave accessories unattended.
- Do not operate this unit in potentially explosive environments.